


COOLEY® SOFFPAK

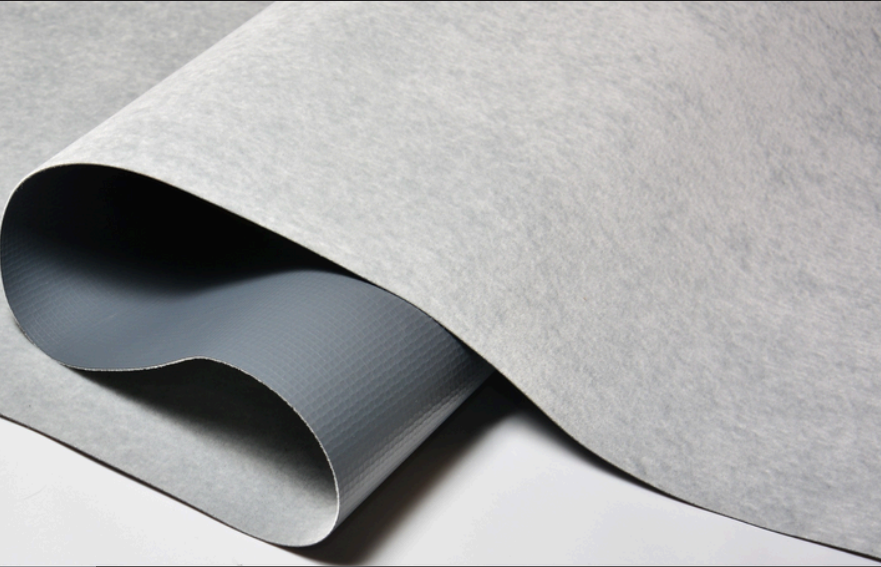

Class A Protection Surface

Soft Surface Technology (SST) offers maximum protection for sensitive automotive parts

Applications

Dunnage Bags | Vertical Pouches
Transport Slings | WIP Racks

Features & Benefits

Durable Class “A” surface
Protects parts from scratching & marring
Double scrim construction for enhanced sewn seam strength
Unique extrusion-coated construction resists delamination
Unique surface eliminates potential for filaments to transfer onto parts
Soft, lightweight, easy to handle, easy to clean

Discover the ultimate in packaging innovation with **SoffPAK** featuring *Soft Surface Technology* (SST)—the Class A Protection Surface engineered to keep your most sensitive automotive parts safe from scratches, scuffs, and damage. Designed with sustainability and performance in mind, SoffPAK delivers unmatched reliability for automotive and industrial packaging needs.

Built using Cooley’s advanced composite high-strength extrusion-coating process, SoffPAK combines durability with reusability to create packaging that outperforms traditional materials. Its unique Soft Surface Technology eliminates the risk of filament transfer, ensuring that parts arrive in pristine condition, every time.

SoffPAK’s double scrim construction boosts seam strength while maintaining a soft, lightweight, contaminant-trapping fabric trusted by manufacturers worldwide. Beyond its superior performance, SoffPAK offers the environmental benefits of reusable packaging while saving customers millions in material and disposal costs.

**For further information, please contact
Cooley Custom Solutions**

Cooley Group
350 Esten Avenue
Pawtucket, RI 02860
Tel: +1 401.724.9000
Email: custom@cooleygroup.com
cooleygroup.com

Cooley® SoffPAK 500998

TECHNICAL DATA

Cover Fabric with *Soft Surface Technology*

COATED FABRIC SPECIFICATIONS*

Revision Date: 21 Sep 2022
Expiry Date: 21 Sep 2027

Total Weight (nominal)	12.3 oz/yd ²
Coating Type	Flexible Vinyl
Coating Distribution	50% back / 50% face
Sealing Properties	Dielectric Thermal

** A variety of standard widths and colors are available.*

PROPERTY	MINIMUM	TYPICAL	TEST METHOD
Grab Tensile (warp)	185 lb/in	190 lb/in	ASTM D751
Grab Tensile (fill)	110 lb/in	122 lb/in	ASTM D751
Trapezoidal Tear (warp)	30 lb	35 lb	ASTM D751
Trapezoidal Tear (fill)	20 lb	22 lb	ASTM D751
Adhesion (warp)	6 lb/in	8 lb/in	ASTM D751
Adhesion (fill)	4 lb/in	6 lb/in	ASTM D751
Abrasion Resistance (CS-17/500 g)	300 cycles	425 cycles	ASTM D3884
Composition	44% vinyl, 27% polyester, 27% Nylon		

Comments: This is a preliminary specification based on limited data. Final production values may vary.

The information contained herein or that is supplied by us, or on our behalf, is based upon data obtained through our own research and is considered accurate. However, no warranty is expressed or implied regarding the accuracy of this data, the results obtained from the use thereof, or that any such use will not infringe upon any patent. This information is furnished upon the condition that the person receiving it shall evaluate its suitability for the specific application.